

T-FACE

FACE MILL

超硬ヘッド交換式ミーリング工具

ヘッド径Φ32-50mm

Face Milling Master



セットアップタイム
削減

簡単に取付可能
独創的なクランプ構造

多刃形状採用、
平面加工対応ヘッド

[Tフェイス]

小径、超硬ヘッド交換式エンドミル、
平面加工用



高生産性



短い突出し
安定性向上




高精度




高経済性

LOGIQMILL
ISCAR CHESS LINES

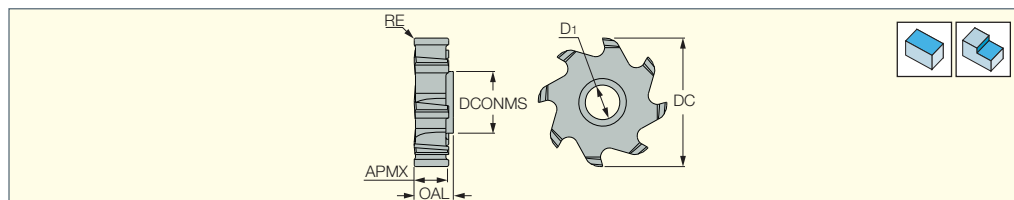

型番	寸法							IC908	推奨加工条件 f _z (mm/刃)
	DC	APMX	NOF ⁽¹⁾	RE	D ₁	DCONMS	OAL		
SD FM D32-8-R0.4-SP15	31.25	8.00	8	0.40	8.40	15.00	8.00	●	0.04-0.15
SD FM D40-10-R0.4-SP17	39.25	10.00	10	0.40	9.80	17.00	10.00	●	0.04-0.15
SD FM D50-12-R0.4-SP19	49.25	12.00	12	0.40	9.80	19.00	14.00	●	0.04-0.15

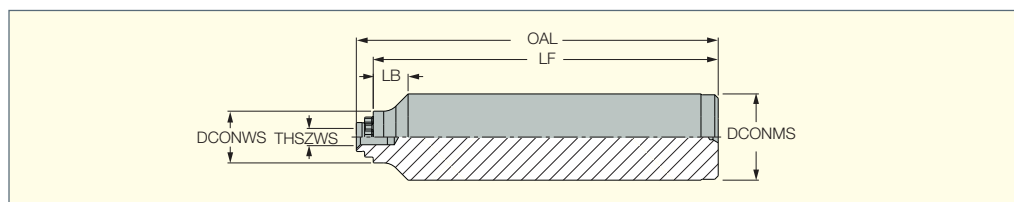⁽¹⁾ 刃列


型番	DCONMS	DCONWS	THSZWS	LB	LF	OAL	シャンク ⁽¹⁾	kg
SD FM-S-A-L100-C25-SP15	25.00	15.00	M5x0.5	10.10	104.90	104.90	C	0.37
SD FM-S-A-L120-W25-SP15	25.00	15.00	M5x0.5	10.10	124.90	124.90	W	0.44
SD FM-S-A-L125-W32-SP17	32.00	17.00	M6x0.5	12.50	131.00	131.00	W	0.75
SD FM-S-A-L140-C32-SP17	32.00	17.00	M6x0.5	12.50	146.00	146.00	C	0.85
SD FM-S-A-L140-C32-SP19	32.00	19.00	M6x0.5	10.00	148.50	148.50	C	1.41
SD FM-S-A-L130-W40-SP19	40.00	19.00	M6x0.5	14.00	138.50	138.50	W	1.21

・スクリューに潤滑油を使用して下さい。

⁽¹⁾ C:円筒、W:ウェルドン

部品

型番			
SD FM-S-A-L100-C25-SP15	SR M5X0.5-SP15-IP20-HG	BLD IP20/S7	SW6-T-SH
SD FM-S-A-L120-W25-SP15	SR M5X0.5-SP15-IP20-HG	BLD IP20/S7	SW6-T-SH
SD FM-S-A-L125-W32-SP17	SR M6X0.5-SP17-IP20-HG	BLD IP20/S7	SW6-T-SH
SD FM-S-A-L140-C32-SP17	SR M6X0.5-SP17-IP20-HG	BLD IP20/S7	SW6-T-SH
SD FM-S-A-L140-C32-SP19	SR M6X0.5-SP17-IP20-HG	BLD IP20/S7	SW6-T-SH
SD FM-S-A-L130-W40-SP19	SR M6X0.5-SP17-IP20-HG	BLD IP20/S7	SW6-T-SH